

MIFI E560S- 1 router configuration for Windows



Plug in the router and insert the SIM card to start

- Open your browser and enter the IP **192.168.1.1**
- Click **Enter**



Enter

- Username: **admin**
- Password: **admin**



MIFI E560S- 1 router configuration for Windows



Click **Quick setup**

- Click **Next**

The screenshot shows the 'Quick Setup Wizard' interface. On the left is a sidebar with menu items: Quick Setup (highlighted), Dial-up, WLAN, DHCP, Security, and System. The main area is titled 'Welcome to The Quick Setup Wizard' and 'Step 1 of 6'. Below the title, it says 'This wizard will show you how to safely set up your Mobile WiFi.' A blue 'Next' button is located in the bottom right corner.

Configure Profile Settings

- Profile name: **misp.wahooproviders.com**
- Dial-up number : ***99#**
- Authentication : **PAP**
- APN: **dynamic**
- IP address: **dynamic**

The screenshot shows the 'Configure Profile Settings' interface, 'Step 2 of 6'. The sidebar on the left is the same as in the previous screenshot. The main area contains the following configuration fields:

- Auto APN:
- Profile name:
- Dial-up number:
- User name:
- Password:
- Authentication:
- APN: Dynamic Static
- IP address: Dynamic Static

At the bottom right, there are 'Back' and 'Next' buttons.



Configure Dial-up Settings

- Connection mode: **auto**
- Click **Next**

Quick Setup

Dial-up

WLAN

DHCP

Security

System

Configure Dial-up Settings

Step 3 of 6

Connection mode: Auto

Back Next

Configure WLAN Settings

- SSID Name: **wahoo MIFI**
- SSID Broadcast : **Enabled**
- Click **Next**

Quick Setup

Dial-up

WLAN

DHCP

Security

System

Configure WLAN Settings

Step 4 of 6

Name SSID (Service Set Identifier): Enter a character string, of up to 32 characters in length, as the name for your wireless local area network (WLAN).

SSID Broadcast

Enabled: Mobile WiFi broadcasts the network SSID and other devices can detect and connect to it.

Disabled: Mobile WiFi does not broadcast the SSID, hiding the name of your network and preventing other devices from detecting or connecting to it.

SSID Name: wahoo MIFI

SSID Broadcast: Enabled

Back Next



Configure WLAN Settings

- 802.11 authentication: **WPA/WPA2-PSK**
- Encryption key: **AES+TKIP**
- WPA pre-shared key : **choose a complex password**
- Click **Next**

The screenshot shows the 'Configure WLAN Settings' screen, which is Step 5 of 6. On the left, there is a sidebar with navigation options: Quick Setup (selected), Dial-up, WLAN, DHCP, Security, and System. The main area contains three configuration fields: '802.11 authentication' set to 'WPA/WPA2-PSK', 'Encryption mode' set to 'AES+TKIP', and 'WPA pre-shared key' with a masked password field. At the bottom right, there are 'Back' and 'Next' buttons.


Configuration Summary

- Click **finish**

The screenshot shows the 'Configuration Summary' screen, which is Step 6 of 6. The sidebar on the left remains the same. The main area displays a summary of the configuration: Auto APN: Disable; Profile name: misp.wahooproviders.com; Dial-up number: *99#; User name: ; APN: ; IP address: ; Connection: Auto; Name (SSID): wahoo MIFI; Authentication: WPA/WPA2-PSK; SSID Broadcast: Enabled; Encryption mode: AES+TKIP. At the bottom right, there are 'Back' and 'Finish' buttons.

Configuration Summary

- WLAN **connected** and connection to the internet should be established

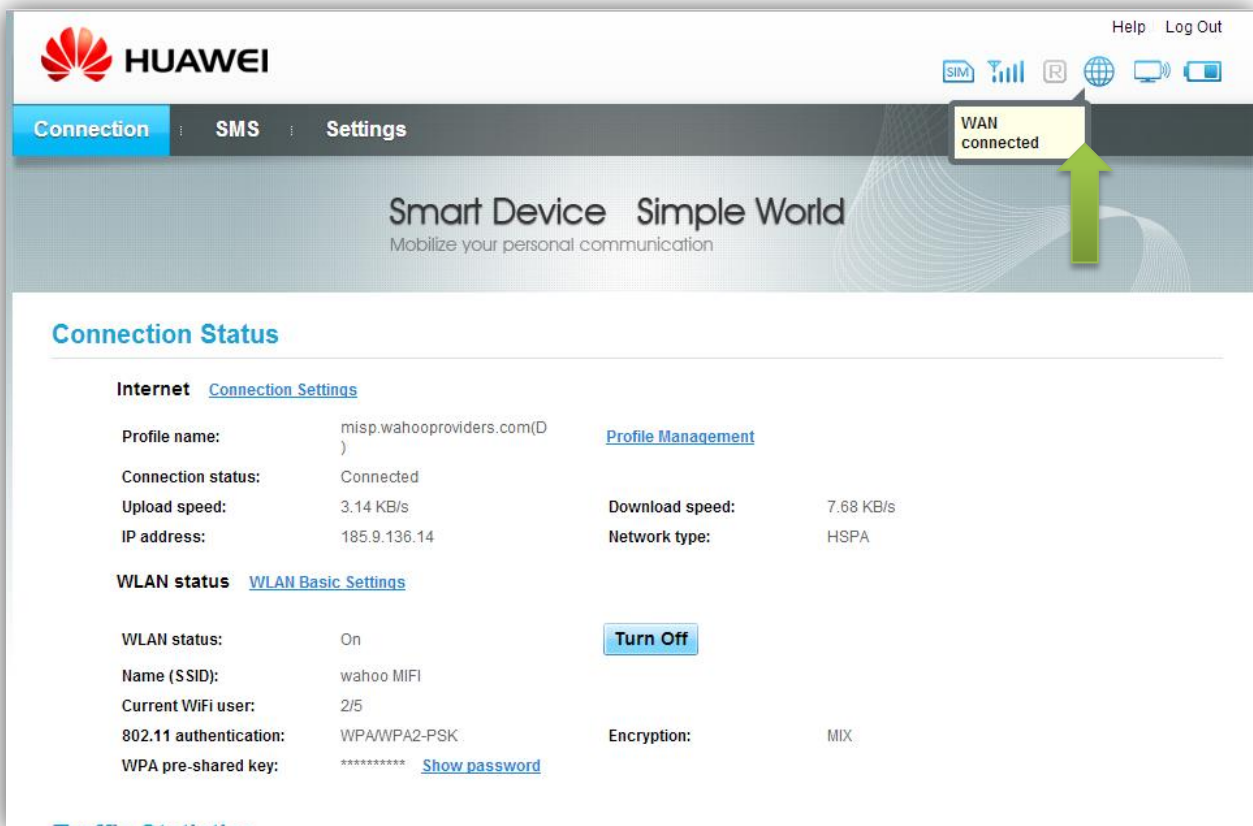

The screenshot displays the Huawei MIFI E560S-1 router configuration interface. At the top, the Huawei logo and 'HUAWEI' are visible on the left, and 'Help' and 'Log Out' are on the right. Below this is a navigation bar with 'Connection', 'SMS', and 'Settings' tabs. A 'WAN connected' status indicator is highlighted with a green arrow. The main content area is titled 'Smart Device Simple World' with the tagline 'Mobilize your personal communication'. Under the 'Connection Status' section, there are two main categories: 'Internet' and 'WLAN status'. The 'Internet' section shows the profile name 'misp.wahooproviders.com(D)', connection status 'Connected', upload speed '3.14 KB/s', IP address '185.9.136.14', download speed '7.68 KB/s', and network type 'HSPA'. The 'WLAN status' section shows the WLAN status is 'On' (with a 'Turn Off' button), name 'wahoo MIFI', current WiFi user '2/5', 802.11 authentication 'WPAWPA2-PSK', and WPA pre-shared key '*****' (with a 'Show password' link). The encryption is set to 'MIX'.

Internet [Connection Settings](#)

Profile name:	misp.wahooproviders.com(D)	Profile Management
Connection status:	Connected	
Upload speed:	3.14 KB/s	Download speed: 7.68 KB/s
IP address:	185.9.136.14	Network type: HSPA

WLAN status [WLAN Basic Settings](#)

WLAN status:	On	Turn Off
Name (SSID):	wahoo MIFI	
Current WiFi user:	2/5	
802.11 authentication:	WPAWPA2-PSK	Encryption: MIX
WPA pre-shared key:	***** Show password	